



AC 250V



Max 25A



-30℃~60℃



UL94-V0




IP 68



UV Resistance

Product Overview:

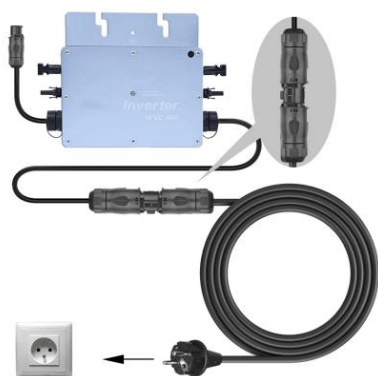

Order Data: BC01 Female Connector to VDE Schuko Plug

BC01 Female could be compatible with Hoymiles\Deye\Envertech\Bosswerk\TSUN-TSOL micro inverters.

PN	C1	C2	C3	Length/m	Remark
A5J301	Betteri BC01 Female	H07RN-F 3G VDE 3*1.5mm ²	VDE Schuko Plug	5m	AC250V,15A,5m
A5J302				10m	AC250V,15A,10m
A5J303				15m	AC250V,15A,15m
A5J304				20m	AC250V,15A,20m
A5J305				30m	AC250V,15A,30m
A5J306	Betteri BC01 Female	H07RN-F 3G VDE 3*2.5mm ²	VDE Schuko Plug	5m	AC250V,25A,5m
A5J307				10m	AC250V,25A,10m
A5J308				15m	AC250V,25A,15m
A5J309				20m	AC250V,25A,20m
A5J310				30m	AC250V,25A,30m
A5J311	Betteri BC01 Female	H07RN-F 3G VDE 3*4.0mm ²	VDE Schuko Plug	5m	AC250V,25A,5m
A5J312				10m	AC250V,25A,10m
A5J313				15m	AC250V,25A,15m
A5J314				20m	AC250V,25A,20m
A5J315				30m	AC250V,25A,30m

Remark:The harness could match 3*1.5mm² to 3*4mm² cables, they could be widely used in different applications. The harness series connectors have IP67 water-proof rating and can be used in a wide operating temperature range from -30 °C to 60 °C. Customized options available, for more information, please contact NIU Power sales team: Marketing@niu-power.com



Product Overview: A5-3CF to VDE Schuko Plug



Order Data: A5-3C Female Connector to VDE Schuko Plug

A5-3CF is compatible with BC01 Male. It also could be compatible with Hoymiles\Deye\Envertech\Bosswork\TSUN-TSOL micro inverters.

PN	C1	C2	C3	Length/m	Remark
A5J316	A5-3P Female (Compatible with BC01 male)	H07RN-F 3G VDE 3*1.5mm ²	VDE Schuko Plug	5m	AC250V,15A,5m
A5J317				10m	AC250V,15A,10m
A5J318				15m	AC250V,15A,15m
A5J319				20m	AC250V,15A,20m
A5J320				30m	AC250V,15A,30m
A5J321	A5-3P Female (Compatible with BC01 male)	H07RN-F 3G VDE 3*2.5mm ²	VDE Schuko Plug	5m	AC250V,25A,5m
A5J322				10m	AC250V,25A,10m
A5J323				15m	AC250V,25A,15m
A5J324				20m	AC250V,25A,20m
A5J325				30m	AC250V,25A,30m
A5J326	A5-3P Female (Compatible with BC01 male)	H07RN-F 3G VDE 3*4.0mm ²	VDE Schuko Plug	5m	AC250V,25A,5m
A5J327				10m	AC250V,25A,10m
A5J328				15m	AC250V,25A,15m
A5J329				20m	AC250V,25A,20m
A5J330				30m	AC250V,25A,30m
PN	Name	IP	PIC	Material	Remark
A5J401	Female Connector water proof Plug	IP68		PPO+Rubber	
A5J402	Male Connector water proof Plug	IP68		PPO	
A5J403	Female Connector dust proof Plug	IP51		TPE	
A5J404	Male Connector dust proof Plug	IP51		TPE	

Remark:The harness could match 3*1.5mm² to 3*4mm² cables, they could be widely used in different applications. The harness series connectors have IP67 water-proof rating and can be used in a wide operating temperature range from -30 °C to 60 °C. Customized options available, for more information, please contact NIU Power sales team: Marketing@niu-power.com

